




SmartGen
ideas for power

SG485-3

INTERFACE EXPANSION MODULE

USER MANUAL

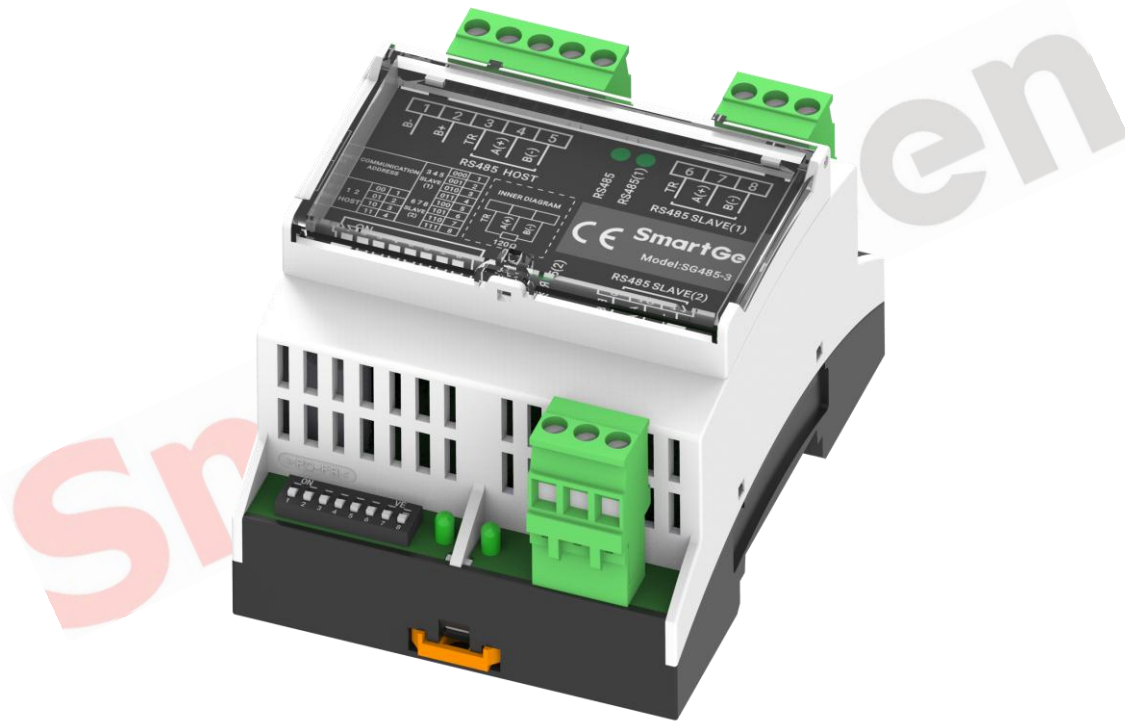

SMARTGEN (ZHENGZHOU) TECHNOLOGY CO., LTD.



Chinese trademark

SmartGen English trademark

SmartGen – make your generator *smart*

SmartGen Technology Co., Ltd.

No.28 Jinsuo Road

Zhengzhou

Henan Province

P. R. China

Tel: +86-371-67988888/67981888/67992951

+86-371-67981000(overseas)

Fax: +86-371-67992952

Web: www.smartgen.com.cn/

www.smartgen.cn/

Email: sales@smartgen.cn

All rights reserved. No part of this publication may be reproduced in any material form (including photocopying or storing in any medium by electronic means or other) without the written permission of the copyright holder.

Applications for the copyright holder's written permission to reproduce any part of this publication should be addressed to Smartgen Technology at the address above.

Any reference to trademarked product names used within this publication is owned by their respective companies.

SmartGen Technology reserves the right to change the contents of this document without prior notice.

Table 1 Software Version

| Date | Version | Note |
|------------|---------|--------------------------------|
| 2021-06-08 | 1.0 | Original release. |
| 2021-07-19 | 1.1 | Update pictures in the manual. |
| 2021-11-06 | 1.2 | Update pictures in the manual. |
| | | |



CONTENTS

| | |
|---|---|
| 1 OVERVIEW | 4 |
| 2 PERFORMANCE AND CHARACTERISTICS..... | 4 |
| 3 SPECIFICATION | 4 |
| 4 WIRING | 5 |
| 5 ELECTRICAL CONNECTION DIAGRAM..... | 6 |
| 6 OVERALL DIMENSION AND INSTALLATION..... | 7 |

SmartGen

1 OVERVIEW

SG485-3 is the expansion module of RS485 interface, which has 3 interfaces, namely RS485 host interface, RS485 slave 1 interface, RS485 slave 2 interface. It can convert 1# RS485 interface to 2# RS485 interface, providing convenience for customers to monitor and collect data via Modbus-RTU protocol.

2 PERFORMANCE AND CHARACTERISTICS

Its main characteristics are as follows:

- With 32-bit ARM SCM, high hardware integration, improved reliability;
- DC(8~35)V continuous power supply;
- 35mm guide rail installation method;
- Modular design and pluggable connection terminals; compact structure with easy mounting.

3 SPECIFICATION

Table 2 Performance Parameters

| Items | Contents |
|---------------------|--|
| Working Voltage | DC(8~35)V |
| RS485 Interface | Baud rate: 9600bps, max. communication distance can reach 1,000m when 120Ω shielded twisted pair line is applied. Stop bit: 1-bit Parity bit: None |
| Case Dimension | 71.6mmx92.7mmx60.7mm (LxWxH) |
| Working Temperature | (-40~+70)°C |
| Working Humidity | (20~93)%RH |
| Storage Temperature | (-40~+80)°C |
| Protection Level | IP20 |
| Weight | 0.14kg |

4 WIRING

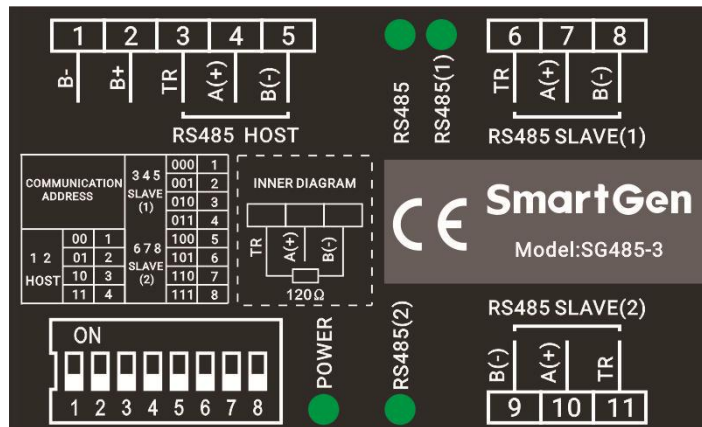


Fig.1 Mask Diagram

Table 3 Indicators Description

| No. | Indicator | Description |
|-----|-----------|--|
| 1. | POWER | Power indicator, always on when powered on. |
| 2. | RS485 | RS485 HOST communication indicator, it flashes 100ms when sending or receiving data. |
| 3. | RS485(1) | RS485 SLAVE(1) communication indicator, it flashes 100ms when sending or receiving data. |
| 4. | RS485(2) | RS485 SLAVE(2) communication indicator, it flashes 100ms when sending or receiving data. |

Table 4 Wiring Terminals Description

| No. | Function | Cable Size | Remark |
|-----|----------------|--------------------|---|
| 1. | B- | 1.0mm ² | DC power negative. |
| 2. | B+ | 1.0mm ² | DC power positive. |
| 3. | RS485 HOST | TR | RS485 host interface communicates with controller, TR can be short connected with A(+), which is equivalent to connecting 120Ω matching resistor between A(+) and B(-). |
| 4. | | A(+) | |
| 5. | | B(-) | |
| 6. | RS485 SLAVE(1) | TR | RS485 slave interface communicates with PC monitoring interface, TR can be short connected with A(+), which is equivalent to connecting 120Ω matching resistor between A(+) and B(-). |
| 7. | | A(+) | |
| 8. | | B(-) | |
| 9. | RS485 SLAVE(2) | B(-) | RS485 slave interface communicates with PC monitoring interface, TR can be short connected with A(+), which is equivalent to connecting 120Ω matching resistor between A(+) and B(-). |
| 10. | | A(+) | |
| 11. | | TR | |

Table 5 Communication Address Setting

| Communication Address Setting | | | | | | | | |
|--|--------------|---|-----------------|---|---|-----------------|---|---|
| Address Dial Switch No. | Host Address | | Slave 1 Address | | | Slave 2 Address | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| Corresponding relation between dial switch combination and communication address | 00:1 | | 000:1 | | | 000:1 | | |
| | 01:2 | | 001:2 | | | 001:2 | | |
| | 10:3 | | 010:3 | | | 010:3 | | |
| | 11:4 | | 011:4 | | | 011:4 | | |
| | / | | 100:5 | | | 100:5 | | |
| | / | | 101:6 | | | 101:6 | | |
| | / | | 110:7 | | | 110:7 | | |
| | / | | 111:8 | | | 111:8 | | |

5 ELECTRICAL CONNECTION DIAGRAM

This module is applied for the expansion of RS485 interface, which can convert 1# RS485 interface to 2# RS485 interface. Common connection examples are as follows:

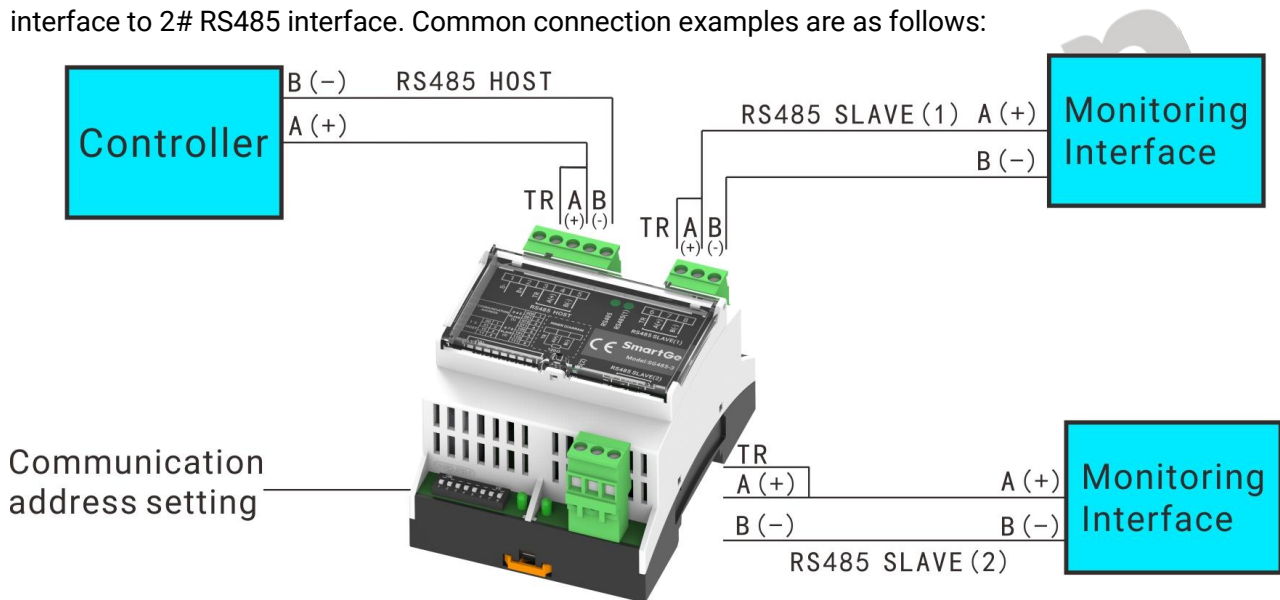


Fig.2 Electrical Connection Diagram



6 OVERALL DIMENSION AND INSTALLATION

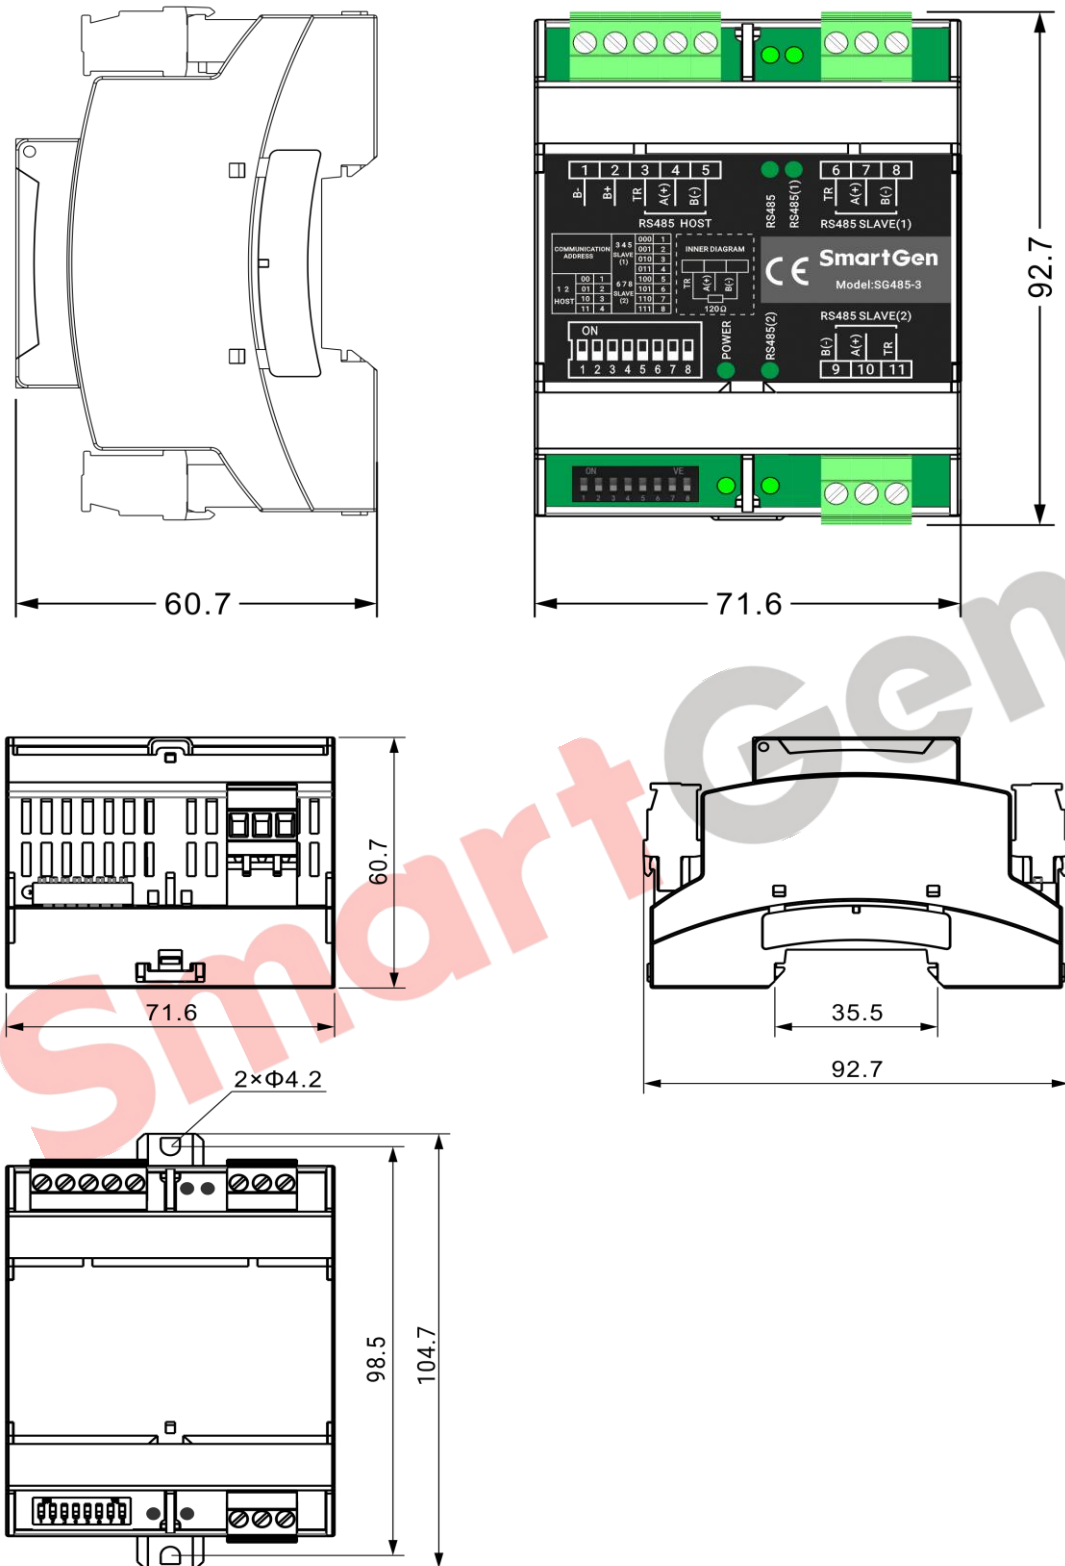


Fig.3 Overall Dimension and Installation (Unit: mm)